

City of Lynchburg
Procurement Division
900 Church Street
Lynchburg, Virginia 24504
Telephone No.: (434) 455-3970
Fax No.: (434) 845-0711

**Addendum for Invitation for Bids
Blue Ridge Farms Phase 2
14-924**

Date: 08/28/2014
From: Lisa Moss, Buyer VCA
RE: Addendum No. 2

This Addendum supplements and amends the original Plans and Specifications and shall be taken into account in preparing proposals and shall become a part of the Contract Documents. The Bidder shall indicate receipt of this Addendum and all previously issued Addenda on the Bid Form.

1. Will new/replacement sanitary sewer laterals that fall within the sewer rehabilitation portion of the project require testing?
No air testing will be required, but all new laterals are to be televised post-installation.

2. General Note 17 on Plan Sheet T-2 states that contact with asbestos cement pipe will be required and that the contractor should handle, cut and dispose of all such pipe in accordance with Federal, State and Local Codes? Where is this AC pipe located? How much should the contractor anticipate having to dispose of?
All existing water lines are believed to be asbestos cement pipe. See Figure 1 for map of existing sizes of waterlines. The waterline along Dandridge was replaced with 8” Ductile Iron Pipe in Phase 1. The majority of the AC pipe will be abandoned in place, but portions will need to be removed to perform cutting and capping (4 locations).

3. Will temporary asphalt patching be required during the winter months when hot mix asphalt plants are closed?
No, Contractor to maintain stone trench patch.

4. On sheet C-3 we are to remove structures 53 and 53A, remove some pipe and also abandon some pipe. Is there somewhere the city wants us to include this price since there is no line item for any of this?
Yes. The removal of structures 53 and 53A shall be included in Sanitary Sewer line construction Item No. 5: “Removal of existing sanitary sewer manholes” and will be paid on an each basis. The abandonment of the 12” pipe and removal/abandon of the existing 18” RCP shall be included in this item No. as well. There will be no separate bid item for this work.

5. Will school bus schedules affect work times?
No, contractor shall coordinate work activities with LCS, but work times will not be affected.

6. **Bore and Jack Water Main Pipe (Water Line Construction Item #3) shall include the pipe.**

Company Name: _____ Address: _____ Date: _____

Authorized Signature: _____ Title: _____

Print Name: _____ Telephone No.: _____

Fax No.: _____

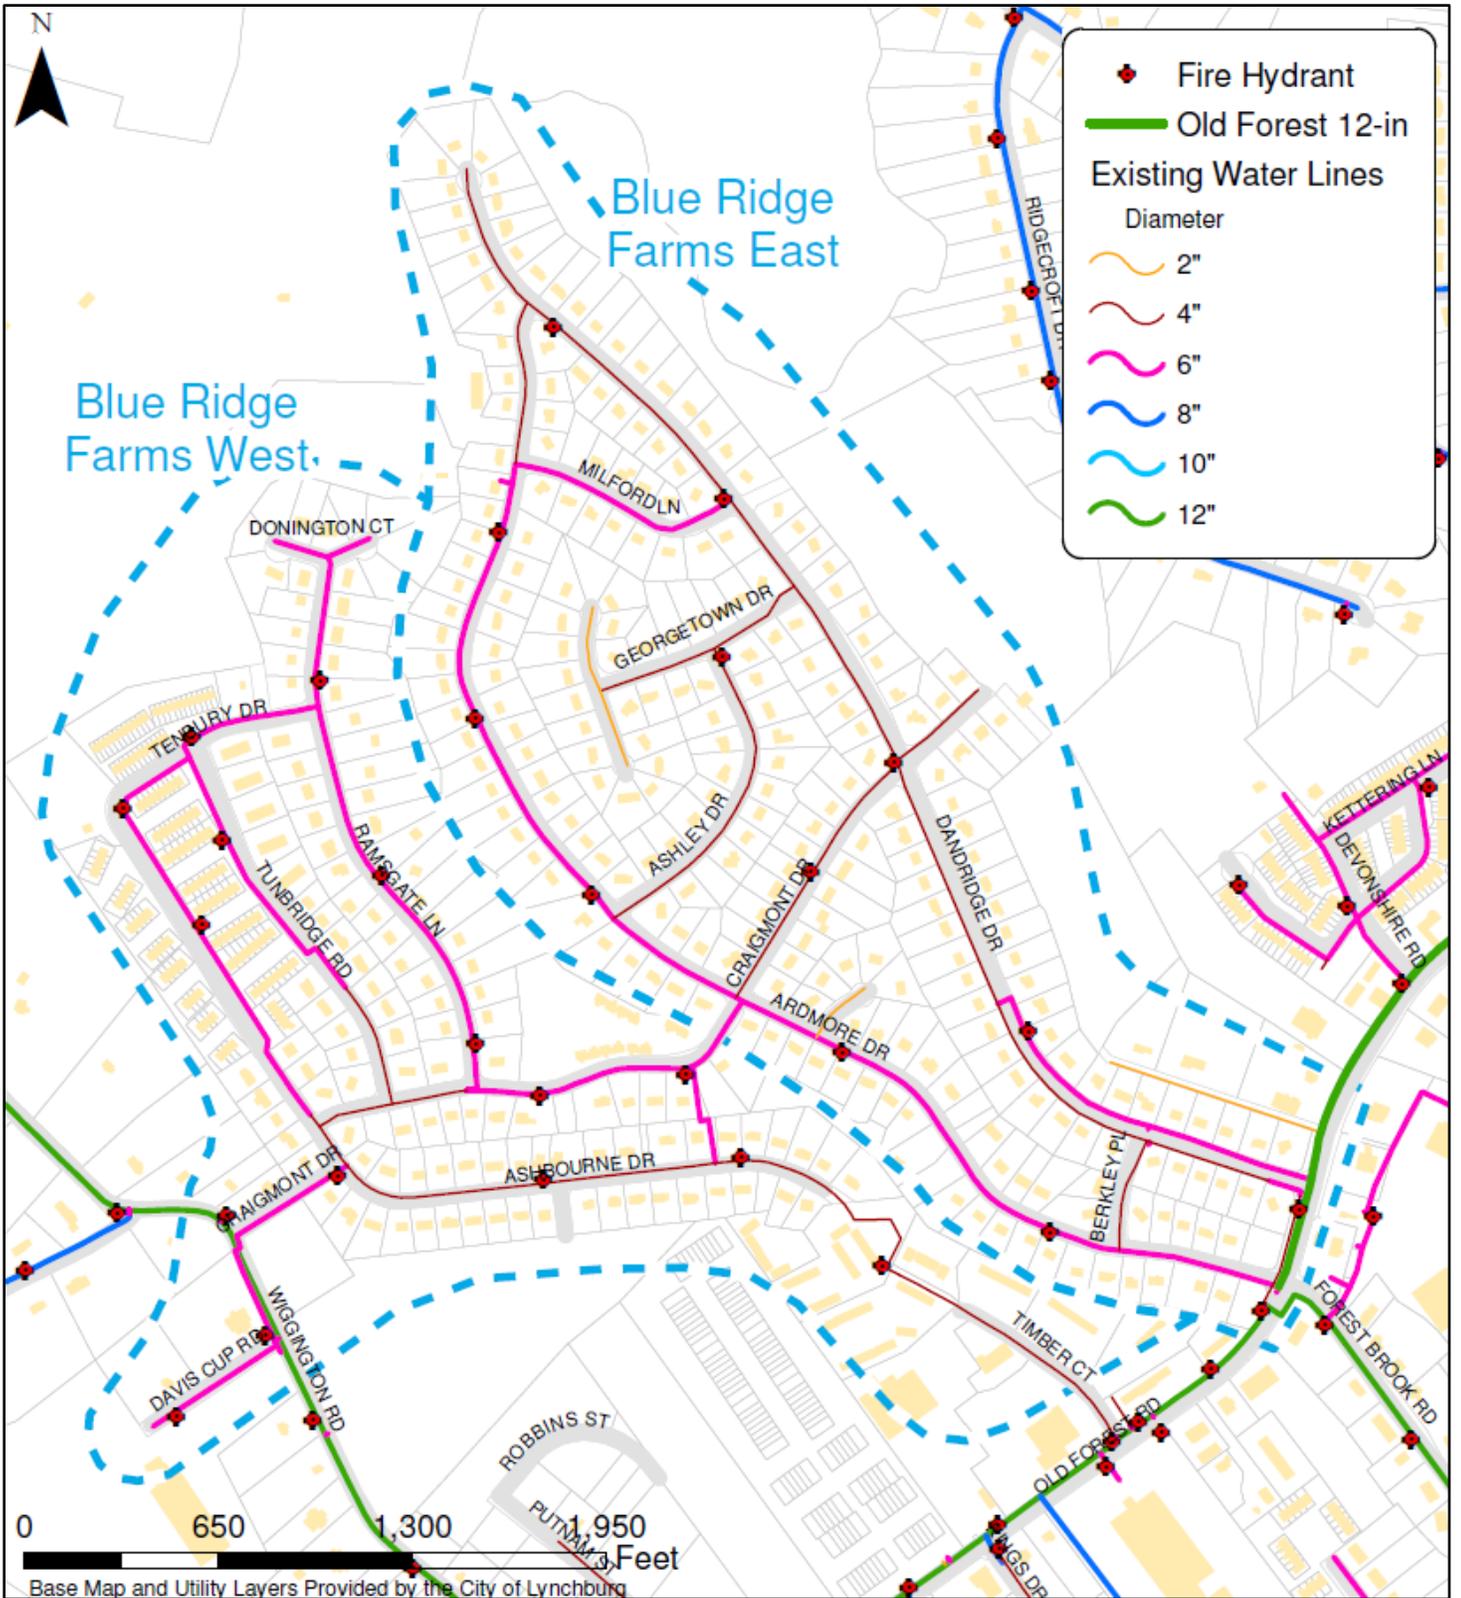


Figure 1 – Blue Ridge Farms Existing Water System