

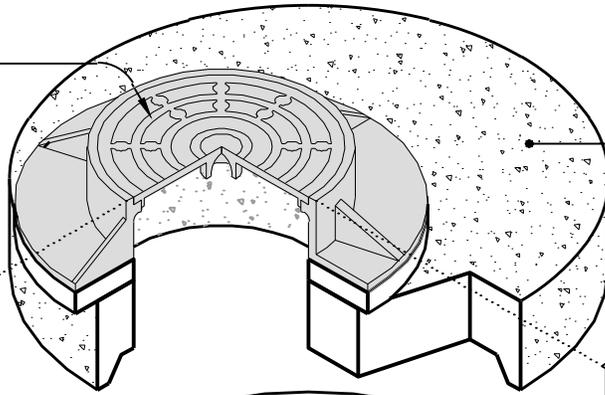


SEE DETAIL 26.23



PRECAST CONCRETE TOP




(2) BRASS STREET ELLS W/THREADED BRASS INSECT SCREEN

BRASS NIPPLE

CORPORATION STOP

TAPPING SADDLE (SEE DETAIL 26.14)

VDOT No. 57 STONE

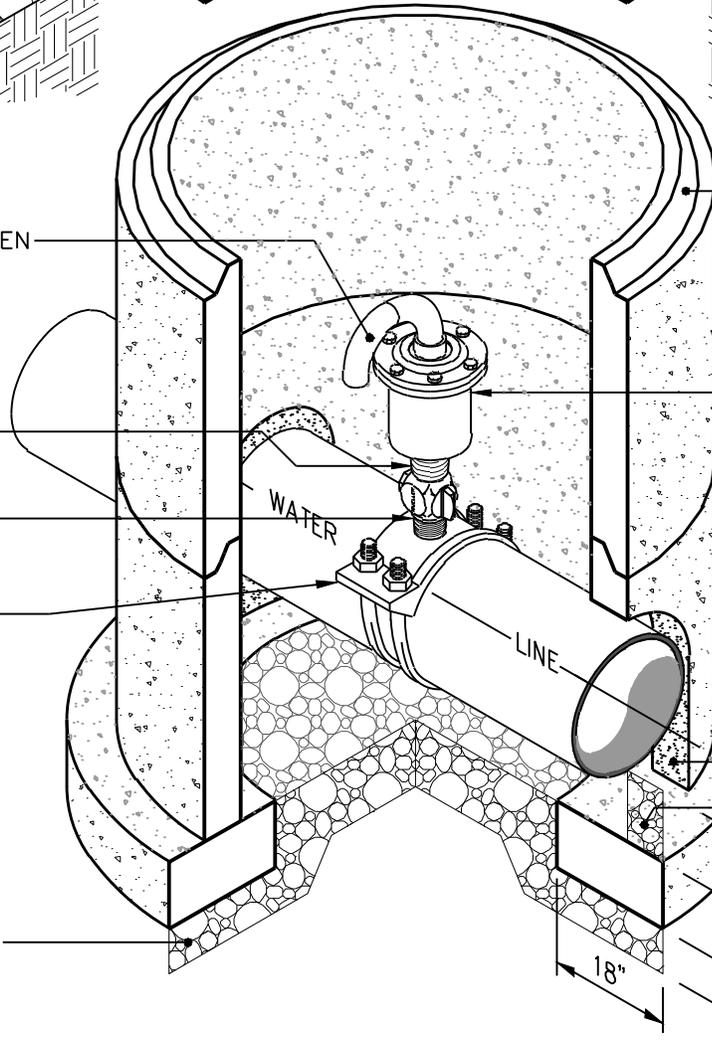

ALL JOINTS TO BE T&G W/ PREFORMED BUTYL RUBBER (MASTIC) OR RUBBER GASKET.

AIR & VACUUM RELEASE VALVE (AUTOMATIC) 1" OR 2" AS NOTED ON PLANS

PRECAST CONCRETE MANHOLE DOGHOUSE BASE

PRECAST CONCRETE BASE OR POURED CONCRETE FOOTING.

GROUT ANNULAR OPENING

STONE TO BOTTOM OF PIPE

VARIES

18"

6" 10"

NOTE:

- 1. CONE SECTION MAY BE SUBSTITUTED FOR FLAT TOP ACCORDING TO DEPTH.



THE CITY OF LYNCHBURG

**AIR & VACUUM RELEASE VALVE
in PRECAST MANHOLE**

USE WITH THE CITY OF LYNCHBURG STANDARD SPECIFICATIONS ONLY

SCALE:
NOT TO SCALE

REVISION DATE:
12-12-2014

DETAIL #
26.11

SHEET #:
1 OF 1