


THIS DRAWING REPRESENTS
MINIMUM INDUSTRY STANDARDS.
CONSULT MANUFACTURER FOR
INSTALLATION DETAILS.

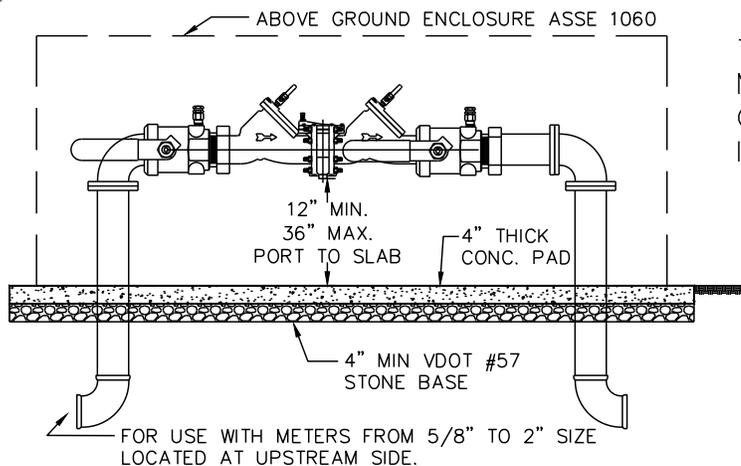

NOTES:

1. REDUCED PRESSURE PRINCIPLE ZONE (RPZ) BACKFLOW PREVENTION ASSEMBLIES SHALL BE ASSE 1013 AND USC APPROVED, AND .025% LEAD-FREE. ASSEMBLIES WHICH MEET THIS SPECIFICATION SHOULD BE CONFIRMED PRIOR TO ORDERING, BY REVIEWING THE LIST OF USC APPROVED ASSEMBLIES AT <http://fccchr.usc.edu/list.html> THOSE MARKED WITH PB: YES ARE .025% LEAD FREE; ALL OTHER NOTATIONS WITHIN THE LIST REGARDING A PARTICULAR MAKE AND MODEL ARE RELEVANT TO ITS USC APPROVAL.
2. RPZ'S SHALL BE LOCATED AS CLOSE TO THE PROPERTY LINE AND METER AS POSSIBLE UNLESS A WAIVER IS SUBMITTED AND APPROVED IN ADVANCE BY THE DEPARTMENT OF WATER RESOURCES. IF A WAIVER IS GRANTED AND A RPZ IS INSTALLED INSIDE A BUILDING, VERTICAL INSTALLATIONS ARE NOT ALLOWED.
3. RPZ'S SHALL BE INSTALLED ABOVE GROUND IN AN ASSE 1060 APPROVED HEATED ENCLOSURE.
4. SHUT OFF VALVES ARE TO BE SHIPPED FROM THE MANUFACTURER AS PART OF THE UNIT. NO SUBSTITUTIONS WILL BE PERMITTED.
5. A MINIMUM OF 2 FEET SHALL BE ALLOWED AT THE FRONT AND REAR OF EACH ASSEMBLY, WITH A MINIMUM OF 1 FOOT AT EACH END TO ALLOW SUFFICIENT SPACE FOR EASE IN TESTING AND MAINTENANCE.
6. THE LINE SHALL BE FLUSHED THOROUGHLY BEFORE INSTALLING THE RPZ TO PREVENT ANY DEBRIS FROM FOULING THE CHECK VALVES CAUSING THE UNIT TO FAIL THE TEST.
7. A STRAINER IS SUGGESTED BUT NOT MANDATORY.
8. UPON COMPLETION OF INSTALLATION CONTRACTOR SHALL NOTIFY THE COMPLIANCE SPECIALIST AT 434-455-4261. AN INITIAL TEST SHALL BE PERFORMED BY A STATE CERTIFIED BACKFLOW PREVENTION DEVICE WORKER TO VERIFY THE ASSEMBLY IS FUNCTIONING CORRECTLY WITH A COPY OF A PASSING TEST SUBMITTED TO THE DEPARTMENT OF WATER RESOURCES. AFTER THE INITIAL TEST, THE PROPERTY OWNER IS RESPONSIBLE FOR THE TEST DUE EACH YEAR ON THE SAME MONTH AS THE INITIAL TEST. THIS TEST SHALL BE COMPLETED BY A CERTIFIED TESTER REGISTERED WITH THE DEPARTMENT OF WATER RESOURCES. A COPY OF A PASSING TEST SHALL BE SUBMITTED TO THE COMPLIANCE SPECIALIST.
9. NO BYPASS IS ALLOWED AROUND THE RPZ ASSEMBLY. NO TAKEOFFS OR CROSS CONNECTIONS ARE ALLOWED IN FRONT OF THE RPZ.
10. ASSEMBLY IS PRIVATELY OWNED AND MAINTAINED.
11. CALCULATIONS TO REVIEW THE AMOUNT OF AVAILABLE WATER PRESSURE AT THE SITE PRIOR TO THE INSTALLATION OF ANY RPZ OR RPDA ASSEMBLY AND THE ESTIMATED EFFECT OF SAID INSTALLATION ARE STRONGLY RECOMMENDED.
12. NO BACKFLOW PREVENTION ASSEMBLY SHALL BE REMOVED, RELOCATED, OR REPLACED WITHOUT PRIOR AUTHORIZATION FROM THE DEPARTMENT OF WATER RESOURCES.
13. ALL PIPE AND FITTINGS USED INSIDE THE ENCLOSURE SHALL BE IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS AND THE MOST CURRENT VERSION OF THE INTERNATIONAL PLUMBING CODE AS ADOPTED BY THE COMMONWEALTH OF VIRGINIA; THE ASSEMBLY SHALL ALSO BE PROPERLY RESTRAINED (BRACED).
14. INSTALLATION, REPLACEMENT, OR RELOCATION OF BACKFLOW PREVENTION ASSEMBLIES SHALL ONLY BE DONE IN ACCORDANCE WITH VIRGINIA TITLE 54.1, CHAPTER 11, AND AS DEFINED IN THE BOARD FOR CONTRACTORS REGULATIONS AT <http://www.dpor.virginia.gov/Boards/Contractors/>.

Private

THE CITY OF LYNCHBURG



REDUCED PRESSURE PRINCIPLE BACKFLOW
PREVENTION ASSEMBLY 5/8" TO 2" METERS

USE WITH THE CITY OF LYNCHBURG STANDARD SPECIFICATIONS ONLY

SCALE:
NOT TO SCALE

REVISION DATE:
12-12-2014

DETAIL #
26.19B

SHEET #:
1 OF 2